



## INSTALLATION AND USE INSTRUCTIONS


### QUICK-RELEASE HEADSET CLAMP

P/N: 43200G-01

#### INSTALLATION

- 1) Locate mounting area (2-1/2" x 3/4", or 64mm x 19mm)
- 2) Position plastic washer (included) as pictured
- 3) Use #10 tapping screw to fasten. Do not overtighten

Headset clamp can be mounted with strap in either direction, based on preference.

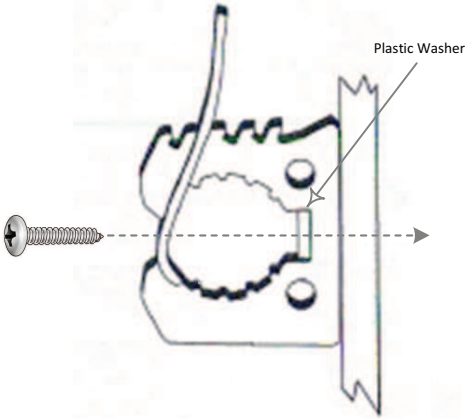

#### USE INSTRUCTIONS

##### ***To open clamp from a closed position:***

- 1) Hold strap firmly
- 2) Pull out and away from notch, then toward the front of the clamp opening

##### ***To close clamp from an open position:***

- 1) Hold strap firmly
- 2) Push over desired notch and set to lock

